




## AGM battery charger (24 Volt)

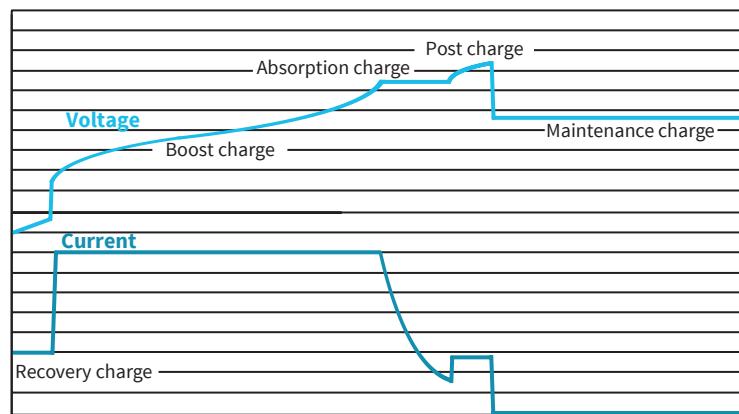

## Typical applications

- Mobility scooters
- Electric wheelchairs
- Electric vehicles
- E-bikes
- Lawn mowers
- Golfcarts
- Medical equipment
- Recreational vehicles

## Features

- AGM battery charger
- Approved for medical applications
- 3-step intelligent charging
- High efficiency
- For indoor use only

|                               |   |
|-------------------------------|---|
| Nominal voltage               | 24 V  |
| Battery capacity              | 6 - 15 Ah   |
| Maximum charging current      | 1.5 A   |
| Suitable for                  | AGM   |
| Output connector              | DC-connector  |
| Input voltage                 | 100 - 240 V   |
| Operational temperature range | 0°C - +40°C   |
| Dimensions Length             | 119 mm  |
| Dimensions Width              | 60 mm   |
| Dimensions Height             | 37 mm   |
| Approximate Weight            | 0.35 kg   |
| Packing                       | 1 pcs/box   |
| Technical features            | Short circuit protection, protection against reverse polarity |
| Certifications                | CE, UL  |
| Standards                     | EN 60601-1:2006+A2:2021<br>EN 60601-1-2:2015/A1:2021          |

## Cellpower family

Cellpower supplies a broad range of reliable AGM, GEL and Lithium batteries. Each product series has its own unique characteristics, so that there is a suitable battery for every application with its associated specific usage profile. Combined with the right Cellpower battery accessories, you are able to assemble a high-quality and reliable battery system.

The Lithium batteries of Cellpower combine unparalleled cyclic performance with a light weight and compact dimensions. These advantages over AGM or GEL batteries make Lithium batteries a very compelling choice for a wide range of applications. They offer more power for a longer period of time.

