


## CCP 24-0.5

## AGM battery charger (24 Volt)



No image available  
at this time

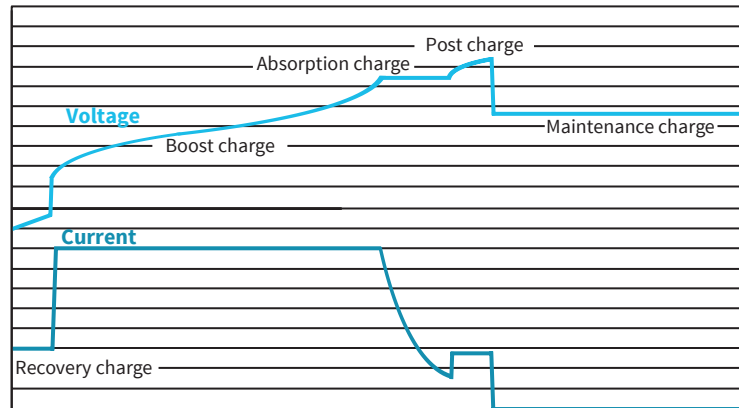

### Typical applications

- Mobility scooters
- Electric wheelchairs
- Electric vehicles
- E-bikes
- Lawn mowers
- Golfcarts
- Medical equipment
- Recreational vehicles

### Features

- AGM battery charger
- Approved for medical applications
- 3-step intelligent charging
- High efficiency
- For indoor use only

Nominal voltage	24 V
Battery capacity	2 - 5 Ah
Maximum charging current	0.5 A
Suitable for	AGM
Output connector	5.5/2.5mm DC-connector
Input voltage	100 - 240 V
Operational temperature range	0°C - +40°C
Dimensions Length	75 mm
Dimensions Width	42 mm
Dimensions Height	28 mm
Approximate Weight	0.1 kg
Packing	1 pcs/box
Technical features	Short circuit protection, protection against reverse polarity
Certifications	CE
Standards	EN 60601-1:2006+A2:2021 EN 60601-1-2:2015/A1:2021

### Cellpower family

Cellpower supplies a broad range of reliable AGM, GEL and Lithium batteries. Each product series has its own unique characteristics, so that there is a suitable battery for every application with its associated specific usage profile. Combined with the right Cellpower battery accessories, you are able to assemble a high-quality and reliable battery system.

The Lithium batteries of Cellpower combine unparalleled cyclic performance with a light weight and compact dimensions. These advantages over AGM or GEL batteries make Lithium batteries a very compelling choice for a wide range of applications. They offer more power for a longer period of time.

